END USER INSTRUCTIONS - READ BEFORE USE

*PRODUCT NAME:*

# Universal Grenade Launcher Holster

*PART NUMBER:*
**GLH-U004XX**

## PACKAGE INCLUDES:

*MOLLE/PALS Straps Configuration*

*GRT® Adapter Configuration*

**NOTE:** Holster is shipped with MOLLE/PALS straps installed and configured for right-hand carry.

***Sling & GRT® Mounting Kit included:***

*Sling*

*GRT® Adapter Panel*

*GRT® Adapter*

*GRT® Reinforced Webbing Adapter*

*Mounting hardware included.*

## INSTALL SLING (INCLUDED)

**NOTE:** It is highly recommended that a sling is used in conjunction with the holster. The holster is intended to serve as a secondary retention method, while a sling serves as the primary retention method.

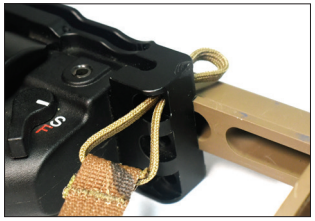

**1** To install sling, slide cord through hole in rear of the grenade launcher.

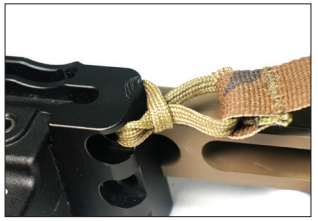

**2** Feed the rest of the sling through the cord and pull tight.

**3** Weave through tri-glide buckle and lock to secure.


*FOR COMPATIBLE ADD ONS CONTACT: SALES@SANDSPRECISION.COM | Compatible with HK GLM/M320 grenade launcher*
*©2022 S&S Precision, LLC | 06282022*

*PRODUCT NAME:*

# Universal Grenade Launcher Holster

*PART NUMBER:*
**GLH-U004XX**

## MOLLE/PALS MOUNTING TO AUTOFIT CUMMERBUND

Begin with the MOLLE/PALS configuration

**1** Weave MOLLE/PALS straps through MOLLE/PALS slots, starting with the stiffened tabs. Tuck stiffened tabs back into the GLH-U.

**2** Detach the side-release buckle, insert grenade launcher into the GLH-U as shown. Trigger will “click” into place when installed securely in GLH-U.

**3** Fasten side release buckle. Cinch the strap tightly around the top of the grenade launcher.

**4** Retain excess strap with the elastic retaining band and insert into inner slot of the GLH-U.



*FOR COMPATIBLE ADD ONS CONTACT: SALES@SANDSPRECISION.COM | Compatible with HK GLM/M320 grenade launcher*

*©2022 S&S Precision, LLC | 06282022*

*PRODUCT NAME:*

# Universal Grenade Launcher Holster

*PART NUMBER:*
**GLH-U004XX**

## ATTACHING GEAR RETENTION TRACK (GRT) ADAPTER

Begin with the MOLLE/PALS configuration

**1** To remove MOLLE/PALS straps open up inside Velcro pocket.

**2** Pull down Velcro flap

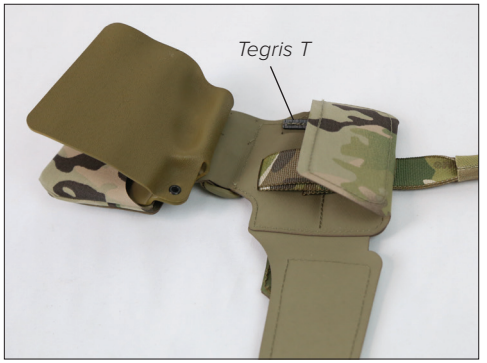


**3** Pull the Termoformed clamp out of the pocket to expose the Tegris T and binding posts.

**4** Remove MOLLE/PALS straps, screws and binding posts. Keep screws and binding posts for GRT installation

**5** Line up GRT® Adapter panel with holes as shown and insert binding post. Turn holster over while holding binding post in place. Repeat on the bottom hole.

**6** Install GRT track with screws and binding post


*FOR COMPATIBLE ADD ONS CONTACT: SALES@SANDSPRECISION.COM | Compatible with HK GLM/M320 grenade launcher*
*©2022 S&S Precision, LLC | 06282022*

*PRODUCT NAME:*

# Universal Grenade Launcher Holster

*PART NUMBER:*
**GLH-U004XX**

## CONVERTING HOLSTER FROM RIGHT HAND CARRY TO LEFT HAND CARRY

**1** Remove MOLLE/ PALS straps. *See page 3.*

**2** Open pocket and pull out thermo-formed clamp. Turn holster over.

**3** Start at center buckle. Pull out end of retaining strap.

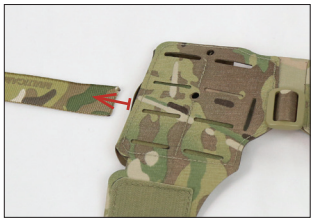

**4** Unweave through tri-glide buckle. Pull out strap.

**5** Remove both ends of split buckle from right panel.

**6** Reattach split buckle to left panel. Open end facing left.

**7** Connect strap buckles. Run retaining strap around the front through side slot and weave out slot shown above.

**8** Reattach MOLLE/ PALS straps. *See page 3.*

**9** Insert clamp and fold Velcro flap up and secure .

Final view of Left-Hand Carry

**TIP:**
Lift MOLLE/PALS slot with screw-driver and insert longer side of buckle first. Twist buckle to insert shorter side.

*FOR COMPATIBLE ADD ONS CONTACT: SALES@SANDSPRECISION.COM | Compatible with HK GLM/M320 grenade launcher*
*©2022 S&S Precision, LLC | 06282022*

*PRODUCT NAME:*

# GRT™-Reinforced Webbing Adapter

*PART NUMBER:*

**GRT-WAR01**

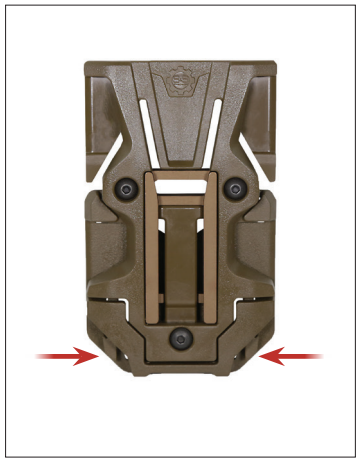

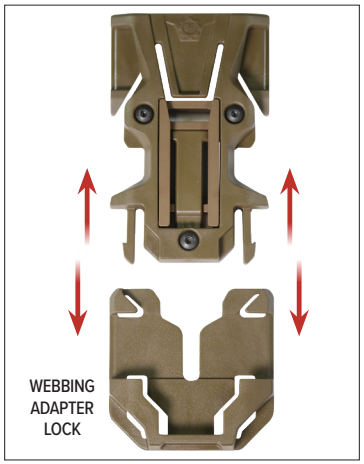


**1** To disassemble the GRT™ Reinforced Webbing Adapter, squeeze the left and right snaps indicated in the image above. Separate the GRT Webbing Adapter and the Webbing Adapter Lock as shown in the image on the right.

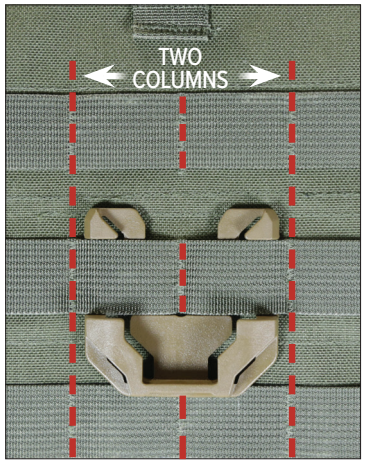


**2** Feed the Webbing Adapter Lock through the desired two columns webbing on the bottom row of MOLLE as shown.

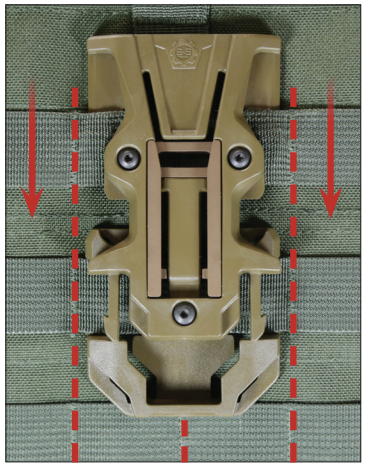

**3** Feed the GRT™ Reinforced Webbing Adapter tabs into the row of MOLLE above the row the Webbing Adapter Lock is located. Ensure that the GRT™ Reinforced Webbing Adapter snaps are prepared to feed into the Webbing Adapter Lock.

Ensure the GRT™ Reinforced Webbing Adapter tabs fit under the tabs from the Webbing Adapter Lock for proper and secure mounting.

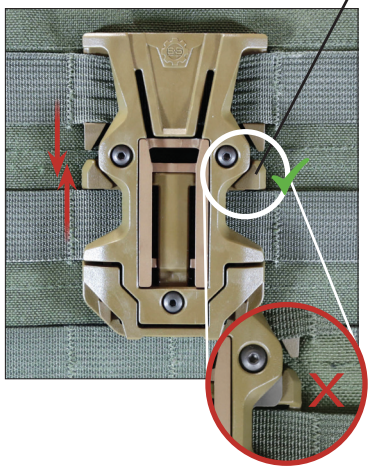

**4** Once the GRT™ Reinforced Webbing Adapter tabs are fed into the top row of MOLLE, pull the adapter down and into the Webbing Adapter Lock. The GRT™ Reinforced Webbing Adapter should snap into the Webbing Adapter Lock indicating that it is secured.



*FOR COMPATIBLE ADD ONS CONTACT: SALES@SANDSPRECISION.COM | Compatible with HK GLM/M320 grenade launcher*

*©2022 S&S Precision, LLC | 06282022*